SMARTS

Invisoglide

A slim-line slider with glass bonded into the sashes, giving very narrow meeting sections and an outer frame that can be hidden in the wall.

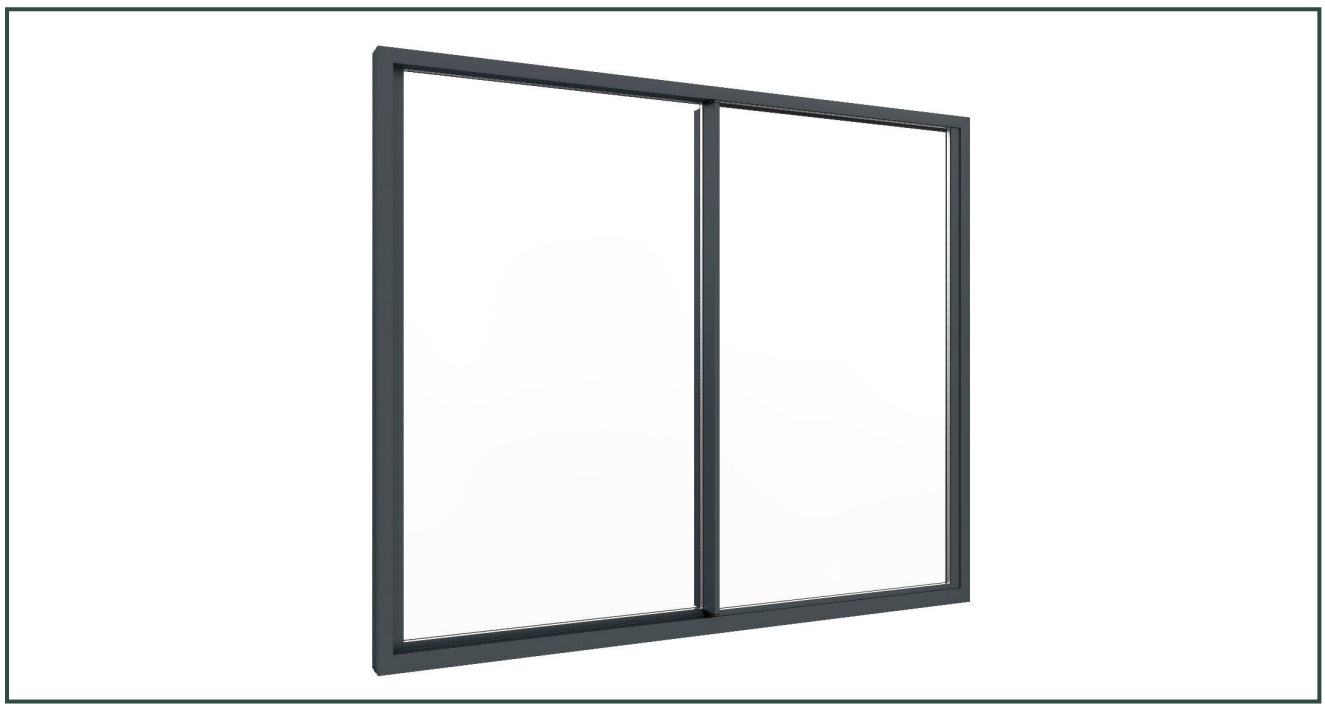

Key features

- ✓ Bonded 32mm glazing
- ✓ 20mm or 26mm interlocks
- ✓ Outer frame can be concealed in the opening
- ✓ Sashes up to 2500mm high and 250kg
- ✓ Door Energy Rating A
- ✓ Document L compliant

Options

- ✓ Dual colour
- ✓ Concealed or exposed outer frame

Specification

U-value	1.4 W/m²K (1.0 centre pane)
Door Energy Rating	A
Max sash	2500mm high, 250kg; no max width
Glazing	32mm bonded
Interlock	20mm or 26mm
Security	Enhanced security (Smarts does not quote a PAS 24 rating)

Configurations

2-pane | 3-pane | Concealed frame

Talk to us about Invisoglide

Survey, design advice and a written quotation.
18 Winton Road, Farnborough, Orpington BR6 7AL

01689 851 938
info@visaglaze.co.uk
www.visaglaze.co.uk

Information is taken from the manufacturer's published data and is provided as a guide. Sizes and performance depend on the final configuration, glass and hardware. Please ask us to confirm details for your project.